




Test Switches

Test Switch Application

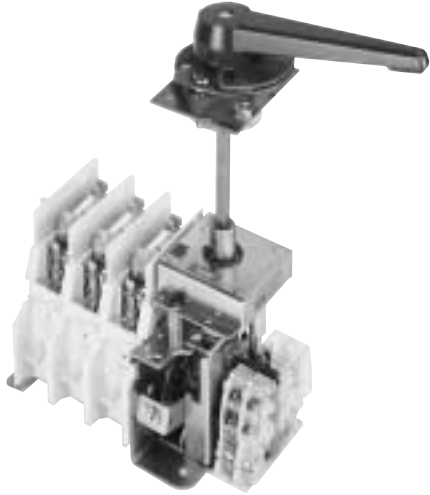

The Test Switch range has been designed to meet a wide range of applications where testing of the control circuits and auxiliary contacts is required without running the motor.

The test facility can be operated with the door closed for optimum protection of personnel, however it can still be operated with the door open if required.

Test Switch auxiliary contacts

The standard 2 circuit auxiliary contact block 61929-2 should be used on the Test Switch - up to 4 blocks can be fitted (see page 23 for dimensions)

TEST SWITCH FUNCTIONS

Type A	<ul style="list-style-type: none"> • Handle OFF - main Switch OFF, Test Aux. OFF, Door FREE • Handle ON - main Switch ON, Test Aux. ON, Door INTERLOCKED • Handle in TEST - main Switch OFF, Test Aux. ON, Door INTERLOCKED • Handle PADLOCKABLE in OFF position
Type B	<ul style="list-style-type: none"> • Handle OFF - main Switch OFF, Test Aux. OFF, Door INTERLOCKED (can be defeated) • Handle ON - main Switch ON, Test Aux. ON, Door INTERLOCKED • Handle in Test - main Switch OFF, Test Aux. ON, Door FREE • Handle PADLOCKABLE in OFF position making defeat function INOPERATIVE
Type C	<ul style="list-style-type: none"> • Handle OFF - main Switch OFF, Test Aux. OFF, Door FREE • Handle ON - main Switch ON, Test Aux. OFF, Door INTERLOCKED • Handle in Test - main Switch OFF, Test Aux. ON, Door INTERLOCKED, • Handle PADLOCKABLE in OFF position
Type D	<ul style="list-style-type: none"> • Handle OFF - main Switch OFF, Test Aux. OFF, Door INTERLOCKED (can be defeated) • Handle ON - main Switch ON, Test Aux. OFF, Door INTERLOCKED • Handle in Test - main Switch OFF, Test Aux. ON, Door FREE • Handle PADLOCKABLE in OFF position making DEFEAT function INOPERATIVE
Type E	<ul style="list-style-type: none"> • Handle OFF - main Switch OFF, Test Aux. off, Door INTERLOCKED (can be defeated) • Handle ON - main Switch ON, Test Aux. ON, Door INTERLOCKED • Handle PADLOCKABLE in OFF position making DEFEAT function INOPERATIVE • Handle OFF - Door OPEN - main Switch OFF, Test Aux. can be OPERATED by HAND

Ordering Guide - Test Switches

For Test Switch types and functions see page 8



	TYPE A	TYPE B	TYPE C	TYPE D	TYPE E					
UFS 25 NFC	62286-1 c/w 3 position HS handle 62427-1 c/w 3 position HS2000 handle	62286-4 c/w 3 position HS handle	62389-1 c/w 3 position HS handle 62428-1 c/w 3 position HS2000 handle	62389-4 c/w 3 position HS handle	62426-1 c/w 2 position HS handle					
UFS 32 A1										
UFS 32										
UFS 32 NFC										
UFS 63										
UFS 63 NFC										
UFS 63 NH										
UFS 100 A3	62286-2 c/w 3 position HK handle	62286-10 c/w 3 position HK handle	62389-2 c/w 3 position HK handle	62389-10 c/w 3 position HK handle	62426-2 c/w 2 position HK handle					
UFS 100 NH										
UFS 160										
UFS 160 AC22										
UFS160 NH										
UFS 200										
UFS250 NH										
UFS 315										
UFS 400										
UFS 400 NH										
UFS630						-	-	-	-	-
UFS 630 NH										
UFS 800 C3										
UFS 800										

OPTIONAL

Switch Shaft Padlock Kit 62390-1 for UFS32A1 to 63
Switch Shaft Padlock Kit 62512-1 for UFS100A3 to 400